

## TQ30 Split-core Current Transformer

The very compact ELEQ TQ30 split-core current transformer is especially designed for connection to digital measurement systems. The TQ30 is supplied with color coded secondary leads. All current transformers are capable of supplying the specified burden at the end of the secondary leads.

Correct closing of the current transformer is guaranteed by a distinct sound of a “**click**”. Two ty-raps are supplied with the current transformer which can be easily mounted around the primary conductor.




### Ordering Specifications

Ratio	Class	Burden <sup>1)</sup>	Sec. Leads	Art.no.
60/1A	3	0,2VA	3 meter	4Q3B02
75/1A	3	0,2VA	3 meter	4Q3B03
100/1A	3	0,2VA	3 meter	4Q3B05
125/1A	3	0,2VA	3 meter	4Q3B07
150/1A	3	0,2VA	3 meter	4Q3B08
200/1A	1	0,2VA	3 meter	4Q3B09
250/1A	1	0,2VA	3 meter	4Q3B10

1) Burden specified at the end of the secondary leads

### Wiring Diagram

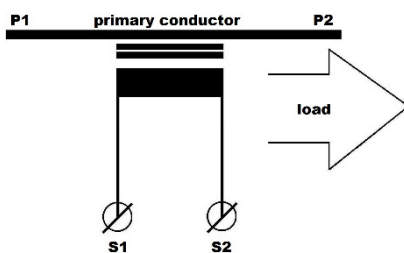

### Technical Specifications

<i>Environmental conditions</i>	
This product is designed to be safe under the following conditions:	
Location:	Indoor use
Operating temperature:	-5 °C .. +40 °C
Relative humidity:	5% .. 85%, non condensing
Protection degree:	IP20
Only suitable for insulated conductors.	
<i>Application conditions</i>	
Standard:	IEC61869-2
Rated short-time thermal current:	60 x In / 1s
Continuous thermal current (Icth):	100%
Rated insulation level:	0,72/3/-kV
Rated frequency:	50/60Hz
Class of insulation:	E (120 °C)
Primary window dimensions:	for conductor max. Ø 18mm
Secondary leads:	0,5mm <sup>2</sup> flexible

### Dimensions

