

IA60B31K – Current Transformer

Flexible, accurate, compact and reliable, those are the keywords of the IA-series of ELEQ. All transformers are equipped with a sealable integrated terminal cover. These – over the full operational temperature range - accurate current transformers are suitable for measurement and for revenue metering (billing). The accuracy is guaranteed from 0,1VA upwards. Therefore there is no need of using load resistors. For revenue metering: the serial number shown on the product is linked with unique measuring data available on our website. ELEQ provides isolated mounting clips which makes the IA-series suitable for mounting on rail or around cables.




Ordering Specifications*

Ratio	Burden	Class	Article Number
100/5A	0 – 1.5VA	0.2S	4M25K12E
150/5A	0 – 3VA	0.2S	4M25K11E
200/5A	0 – 3VA	0.2S	4M25K3E
250/5A	0 – 3VA	0.2S	4M25K8E
300/5A	0 – 5VA	0.2S	4M25K1E
300/5A	0 – 1VA	0.2S	4M25K6E
600/5A	0 – 5VA	0.2S	4M25K4E
600/5A	0 – 2VA	0.2S	4M25K7E

* Those articles are standard executed with short-circuit bridge. In short, during the installation the product is short-circuit and after mounting this can easily be undone.

For another ratio, class, burden or double measurement ranges, please consult our Sales Department for more information.

Wiring Diagram

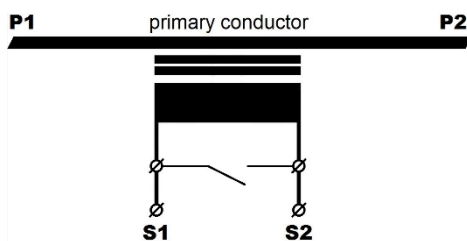

Technical Specifications

<i>Environmental conditions</i>	
This product is designed to be safe under the following conditions:	
Location:	Indoor use
Operating temperature:	-25°C .. +40°C
Relative humidity:	5% .. 85%, non condensing
Protection degree:	IP20
<i>Application conditions</i>	
Standard:	IEC 61869-2
Rated short-time thermal current:	60 x I _n / 1s
Continuous thermal current (I _{ct}):	1 x I _n
Rated insulation level:	0,72/3/-kV
Rated frequency:	50/60Hz
Class of insulation:	E
Primary window dimensions:	Max cable: Ø 24,5 mm Max rail: 30x10mm
Secondary terminals:	Screw terminals (max. torque 2Nm) Max. cross-sectional area of cable (stranded or solid) 6mm ²

Dimensions

